


UPI-800NR

Fireman Intercom Network Router Interface


Features

1. Equipped for data analysis and the intelligent filtering of data streams, as well as the integration of advanced digital and voice functionalities.
2. Dual bus power supply.
3. The indicator light blinks during testing, and neighboring pathways indicate interconnection issues when faults occur.
4. Optoelectronic isolation is implemented to minimize noise interference.
5. Mounting on the board is required.

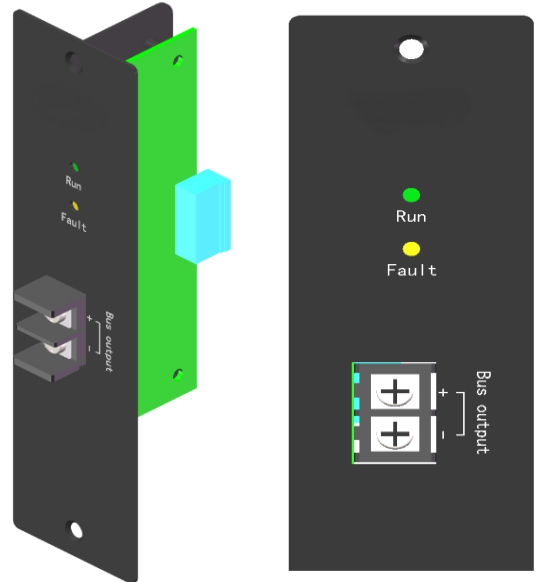

Technical Specifications

- Frequency response: 300-3400Hz (± 3 dB)
- Rated power: ≤ 1 W
- Installation method: plug-in type
- Dimensions: 160mm * 45mm * 60mm
- Relative operating environment humidity: 10% to 90%RH.
- Operating environment temperature: $-10^{\circ}\text{C}\sim 40^{\circ}\text{C}$.
- Operating environment temperature: $-10^{\circ}\text{C}\sim 40^{\circ}\text{C}$.

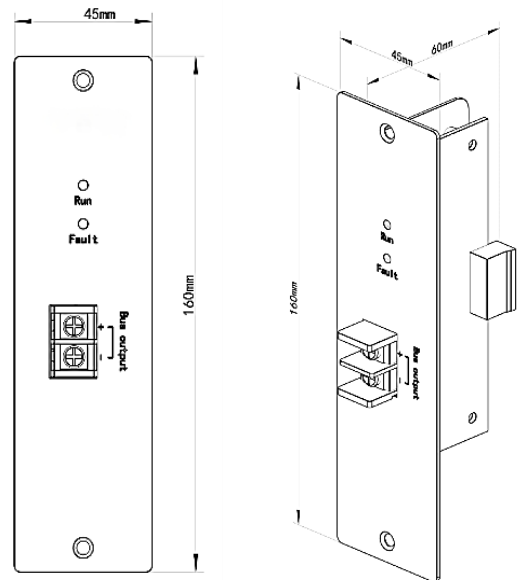

©2024 by United Protection International Co. Ltd. All rights reserved.
Unauthorized use of this document is strictly prohibited.

This document is not intended to be used for installation purposes.
We try to keep our product information up-to-date and accurate.
We cannot cover all specific applications or anticipate all requirements.
All specifications are subject to change without notice.

For more information, please contact UPI. Phone: (852) 3611 9831



United Protection International Company Limited
YOUR LIFE SAFETY PARTNER