

UPI-800TH

Fireman Intercom Handset Plug-in with Chord

Description


The fireman's handset facilitates two-way emergency phone communication between firefighters and other authorized personnel who manage a Life Safety System. It is compatible with various life safety control systems and offers the advantage of seamless integration with systems that utilize addressable and zone telephone circuits, all within a single versatile product package.

The fireman's handset is intended for use alongside the addressable bus fire intercom phone jack UPI-800TJ and is essential for establishing two-way audio voice communication linked to the UPI-850TE bus fireman intercom control panel (host). During operation, the fire duty officer can plug the phone handset with the jack chord into the phone jack at any moment to contact the fire command center in emergency situations.



Technical Specifications

- Frequency response: 300 to 3400Hz(±3dB)
- Relative operating environment humidity: 10% to 90%RH.
- Operating environment temperature: 0~40°C.
- With Φ 6.5mm single core audio plug.
- Plug wire length: shrink \approx 45cm, pull out \approx 150cm
- Dimensions: 194mm×46mm×42mm.
- Weight: 120g.

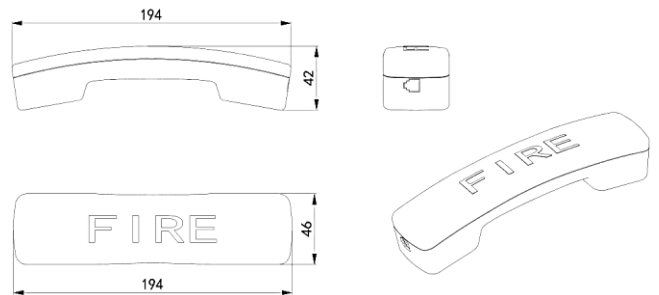

©2024 by United Protection International Co. Ltd. All rights reserved.
Unauthorized use of this document is strictly prohibited.

This document is not intended to be used for installation purposes.
We try to keep our product information up-to-date and accurate.
We cannot cover all specific applications or anticipate all requirements.
All specifications are subject to change without notice.

For more information, please contact UPI. Phone: (852) 3611 9831



United Protection International Company Limited
YOUR LIFE SAFETY PARTNER